

ADSL Filter

DSL004A

Catalogue No. 090-00095

- Compact package.
- High quality low pass filter with optimum performance.
- Compliant to ACA requirements.
- Removes radio interference on the line.




Specifications

- Return loss reference Impedance
220 ohms + (820 ohms/115nF)
- Return loss
300Hz-2000Hz >15dB
2000Hz-3400Hz >15-(f-2000)/466.7
3.4kHz-10kHz local port >8dB
- Insertion Loss 300Hz-3400Hz
<1+(f-300/1240 Max.
- Delay distortion @ 0.3-3.4kHz <150 μ S
- DC Resistance <100ohms
- DC current range 18mA-100mA
- Insulation resistance >10 Mohms
- High Freq. Insertion loss
30kHz-100kHz (> 22dB)
100kHz-300kHz (> 31dB)
300kHz-1104kHz (>50dB)

Compliance

- ACA Labelling notice requirement
- AS/ACIF S002 amendment 1:2001
- Safety: TS001 and AS/NZS 3260

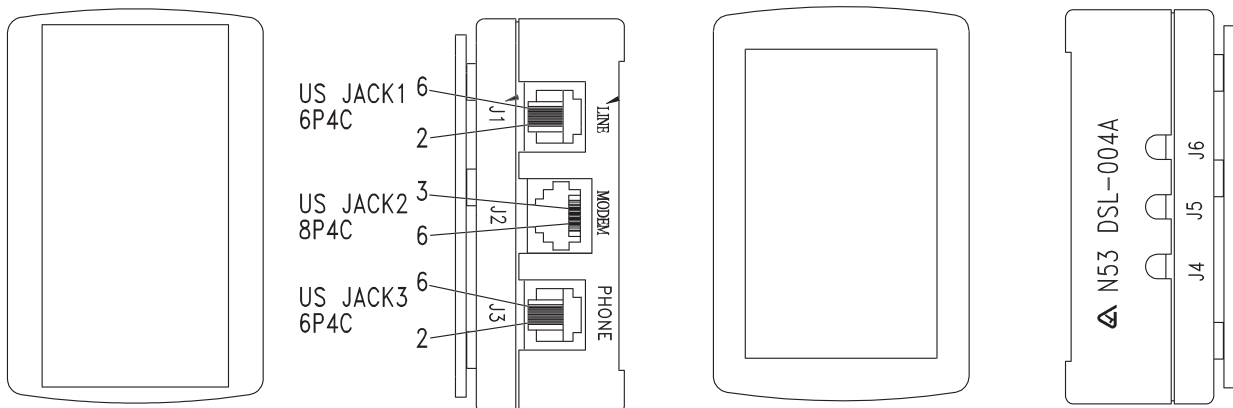

OPEN Networks Pty Ltd
Level 5, 342 Flinders Street
Melbourne, VIC. 3000

Tel: +61 3 8613 0500
Fax: +61 3 8613 0501
Web: www.opennw.com

Note: Specifications are subject to change without notice
Copyright © 2006 OPEN Networks Pty Ltd. All Rights Reserved